




SMARTMOUNT^{XT}™

Audio Visual Mounting Solutions

The SmartMountXTTM series from Peerless-AVTM offers a range of versatile and easy to install mounting solutions, packed with clever features designed to enhance and simplify any professional AV installation.

The result of listening to our customers' needs for a complete AV wall mounting solution, the SmartMountXT line gets you closer to the wall, saves installation time and adds value to the end-user experience.

This stunning line of mounts plus accessories delivers first-class features such as One-TouchTM tilt, post-installation adjustments, enhanced security options, as well as compatibility with a complete line of accessories that make setting up the perfect AV system an effortless task.

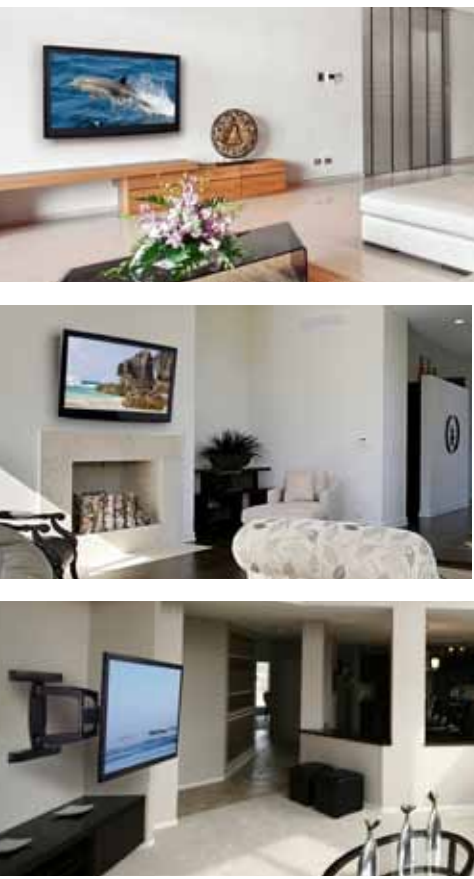

INTEGRATED
PARTNER
PROGRAM


Your ticket to exclusive First Class Service! The Peerless-AV Integrated Partner Program rewards reseller sales representatives with great benefits and elite privileges that recognize your value to our organization. Partners are first to receive new product announcements, access to exclusive product lines, priority contact with industry-leading customer service, technical support and engineering services, all delivered in a password-protected website. The features and benefits of the program ensure you are well informed, better educated, and totally dialed-in to Peerless-AV. Contact your Peerless-AV representative for more information on joining the Program.

Key Features and Benefits



Open wall
plate design

SmartMountXT's thin, open wall plate design gives greater flexibility for cable and power cord management options behind the display




Reduced
profile

The depth of the SmartMountXT range has been reduced by 35%, bringing the display closer to the wall for an almost invisible installation



Security
versions

Where an installation requires added security and theft deterrence, locking versions supplied with keyed-alike padlocks are available

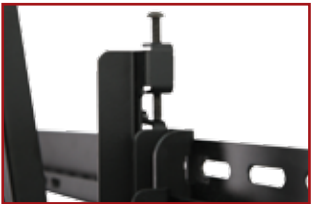

Post-installation
height adjustment

Every model features $\pm 0.5"$ of vertical micro-adjustment, enabling display height and roll to be modified by turning a single screw



One-TouchTM Tilt

STX and SAX models offer $+15/-5^\circ$ tilt adjustment, requiring no tools, friction hinge or knob. IncreLokTM tilt lock delivers precise display alignment for multi-display installations.




Internal cable
management

SAX models route cables through the arms of the mount, preventing cords becoming tangled and maintaining a clean and tidy appearance



With a slim profile, the SmartMountXT line of flat wall mounts offers the perfect solution for secure, low-profile applications. Wall placement options are endless with quick, simple horizontal and vertical adjustments. Its sleek, open wall plate architecture offers placement flexibility and cable routing options.

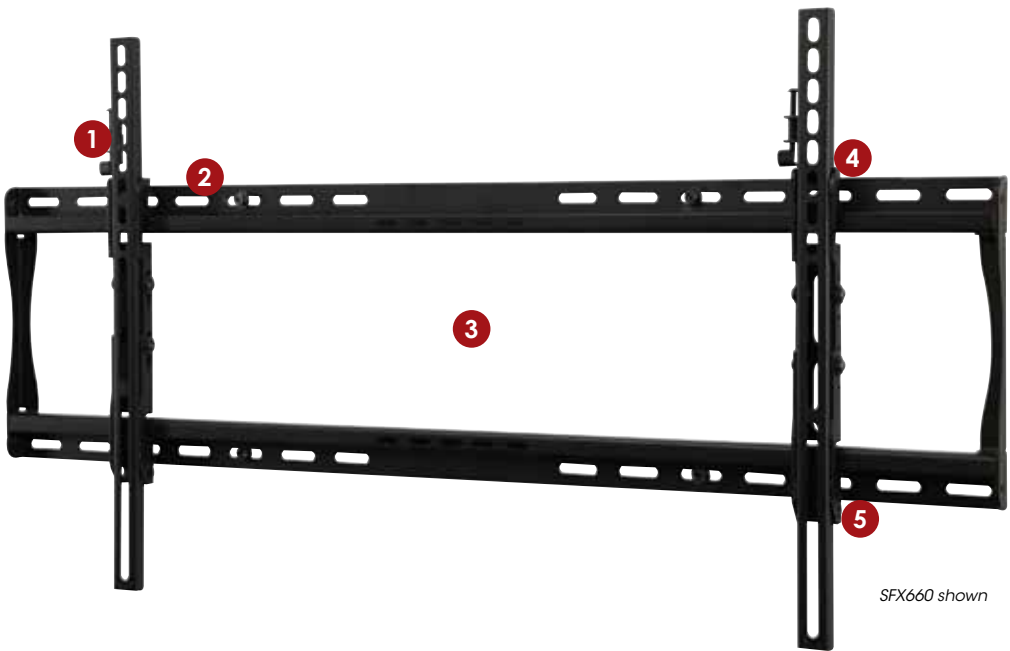

- 1. POST-INSTALLATION ADJUSTMENT**
±0.5" of vertical adjustment for post-installation leveling and height adjustment fine-tuning
- 2. VIEWING FLEXIBILITY**
Up to 24" of horizontal adjustment for centering display on wall
- 3. OPEN ARCHITECTURE**
Open wall plate architecture for flexible cable management and wall placement
- 4. EASY INSTALLATION**
Universal display adapter brackets easily hook onto wall plate for fast installation
- 5. SECURE INSTALLATION**
Theft resistant screws on secure units

SFX660 shown



SFX645(P)



SFX650(P)



SFX660(P)



Up to 1" (25.4mm) of height adjustment



Low-profile design holds display only 1.21" (31mm) from the wall

P denotes Phillips Head Screws

	Display size	32" to 46"	32" to 55"	46" to 70"
	VESA® pattern	up to 400 x 400mm	up to 600 x 400mm	up to 800 x 400mm
	Adjustable mounting pattern (W x H)	up to 452 x 433mm (17.79" x 17.04")	up to 744 x 433mm (29.29" x 17.04")	up to 827 x 433mm (32.54" x 17.04")
	Distance from the wall	1.21" (31mm)	1.21" (31mm)	1.21" (31mm)
	Horizontal display adjustment	up to 13" (330mm)	up to 25" (635mm)	up to 24" (610mm)
	Max load	80lb (36kg)	120lb (54kg)	150lb (68kg)

UNIVERSAL FLAT WALL MOUNTS ACCESSORIES

SMARTMOUNTXTTM

pg 10-11

ACCXT402:
Recessed Power Outlet with Low Voltage In-Wall Cable Routing


ACCXT302:
Video Conferencing Accessory Shelf

ACC415:
4-pack Metal Stud Fastener Kit

IBA4-W:
Easy Mount Recessed Low Voltage Cable Plate



The SmartMountXT series of tilt wall mounts simply delivers with easy horizontal and vertical adjustment for optimum display placement. Its sleek, open wall plate architecture offers flexibility in wall positioning with open area for outlet and cable management routing. One-Touch™ tilt technology completes the installation with the included IncreLok™ tilt locking option at set angles for the best possible view of the display.

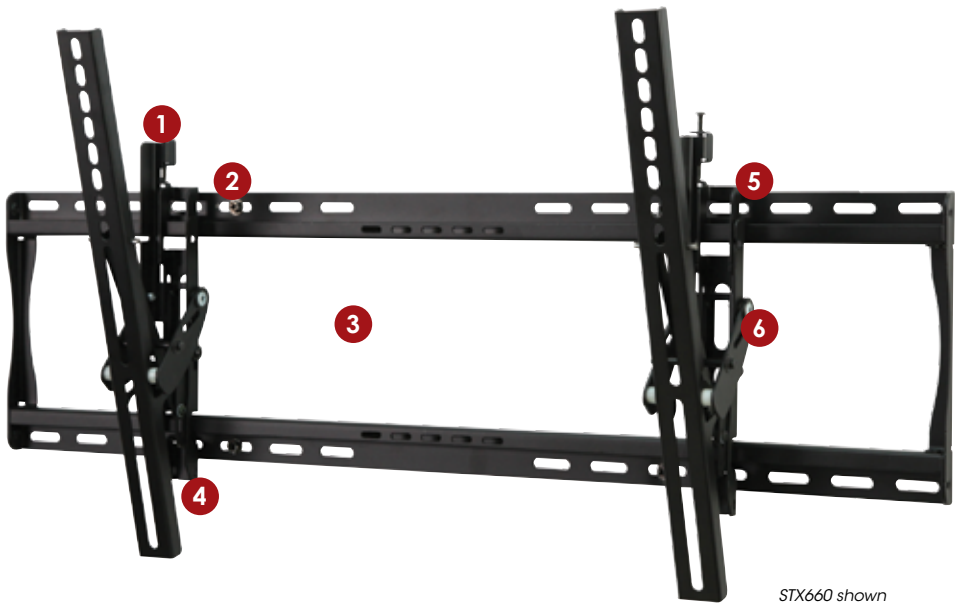

- 1. POST-INSTALLATION ADJUSTMENT**
±0.5" of vertical adjustment for post-installation leveling and height adjustment fine-tuning
- 2. VIEWING FLEXIBILITY**
Up to 23" of horizontal adjustment for centering display on wall
- 3. OPEN ARCHITECTURE**
Open wall plate architecture for flexible cable management and wall placement
- 4. SECURE INSTALLATION**
Theft resistant screws/padlock on secure and locking units
- 5. EASY INSTALLATION**
Universal display adapter brackets easily hook onto wall plate for fast installation
- 6. IDEAL VIEWING ANGLE**
Universal tilt adapter brackets offer up to +15/-5° of One-Touch™ tilt adjustment in one easy motion

STX660 shown



STX645(P)(L)



STX650(P)(L)



STX660(P)(L)



Up to 1" (25.4mm) of height adjustment



Low-profile design holds display only 1.69" (43mm) from the wall



Included padlock on locking model prevents access to security screw on vertical adaptor bracket

P denotes Phillips Head Screws
L denotes Security Screws and Keyed Alike Padlock

	Display size	32" to 46"	32" to 55"	46" to 70"
	VESA® pattern	up to 400 x 400mm	up to 600 x 400mm	up to 800 x 400mm
	Adjustable mounting pattern (W x H)	up to 431 x 433mm (16.96" x 17.04")	up to 723 x 433mm (28.46" x 17.04")	up to 805 x 433mm (31.71" x 17.04")
	Distance from the wall	1.69"-6.55" (43-166mm)	1.69"-6.55" (43-166mm)	1.69"-6.55" (43-166mm)
	Tilt	+15°/-5° One-Touch™ tilt	+15°/-5° One-Touch™ tilt	+15°/-5° One-Touch™ tilt
	IncreLok™	-5°, 0°, 5°, 10° and 15°	-5°, 0°, 5°, 10° and 15°	-5°, 0°, 5°, 10° and 15°
	Horizontal display adjustment	up to 13" (330mm)	up to 24" (610mm)	up to 23" (584mm)
	Max load	80lb (36kg)	120lb (54kg)	150lb (68kg)

UNIVERSAL TILT WALL MOUNTS ACCESSORIES

SMARTMOUNTXTTM

pg 10-11

ACCXT402:
Recessed Power Outlet with Low Voltage In-Wall Cable Routing

ACCXT302:
Video Conferencing Accessory Shelf

ACC415:
4-pack Metal Stud Fastener Kit

IBA4-W:
Easy Mount Recessed Low Voltage Cable Plate



Brilliant in their remarkable form and function, the SmartMountXT series of articulating mounts allow for unlimited placement options, underscored by full extension and swivel. Installation fine-tuning is a breeze with advanced features for post-installation height adjustment, roll and lateral shift. Fully incorporated cable management offers a clean, well-protected and organized solution for hiding unsightly cable mess. Complete the flawless installation with an optional wall plate knockout for in-wall cable routing and power.



- 1. CLEAN AND CONCEALED INSTALLATION**
Internal cable management system keeps cables concealed and organized
- 2. VIEWING FLEXIBILITY**
Arm extends up to 26.54" (674mm) from the wall for SAX762PU and SAX772PU
- 3. CLEAN APPEARANCE**
Open wall plate design for installation flexibility
- 4. POST-INSTALLATION LEVELING**
±5° of roll
- 5. WALL PLATE KNOCKOUT**
Increased cable and power management options with optional in-wall accessory for powering flat panel display and routing low-voltage cables through the wall
- 6. LANDSCAPE TO PORTRAIT ROLL**
Rotate 90° without removing the display



SAX755PU



SAX762PU



SAX772PU



Internal cable management



Up to 1" (25.4mm) of height adjustment



Optional Accessory ACCXT400

	Display size	40" to 52"	40" to 63"	50" to 71"
	VESA® pattern	up to 600 x 400mm	up to 600 x 400mm	up to 800 x 600mm
	Adjustable mounting pattern (W x H)	up to 661 x 449mm (26.03" x 17.69")	up to 661 x 449mm (26.03" x 17.69")	up to 813 x 607mm (32.03" x 23.91")
	Distance from the wall	2.54"-26.41" (65-671mm)	2.60"-26.54" (66-674mm)	2.60"-26.54" (66-674mm)
	Tilt swivel roll	+15°/-5° One-Touch™ tilt ±90° ±5°	+15°/-5° One-Touch™ tilt ±90° ±5°	+15°/-5° One-Touch™ tilt ±90° ±5°
	Horizontal display adjustment	up to 18" (461mm)	up to 18" (461mm)	up to 24" (613mm)
	Landscape to portrait	Yes	Yes	Yes
	Max load	80lb (36kg)	110lb (50kg)	135lb (61kg)

UNIVERSAL ARTICULATING WALL ARMS ACCESSORIES

ACCXT400:
Recessed Power Outlet with Low Voltage In-Wall Cable Routing

ACC953:
Component Shelf Accessory

ACC415:
4-pack Metal Stud Fastener Kit

ACCXT100:
Left and Right Speaker Accessory Mount

ACCXT200:
Soundbar Accessory Mount

ACCXT300:
Video Conferencing Accessory Shelf

IBA4-W:
Easy Mount Recessed Low Voltage Cable Plate

IBA5-W:
Recessed Low Voltage Media Plate with Duplex Surge Suppressor

pg 10-11

SPEAKER MOUNTS



Left/Right Speaker Accessory

ACCXT100



Shown with SAX762PU

- 1. ADJUSTABLE DEPTH**
Curved rod design allows speakers to be swiveled to the desired depth
- 2. EXPANDABLE**
Easily adjust the width of the speaker accessory to fit most flat panel displays
- 3. UNIVERSAL FIT**
Accommodates most speaker models
- 4. LOW-PROFILE**
Does not add additional depth to the installation of the mount

Soundbar Speaker Accessory

ACCXT200



Shown with SAX762PU

- 1. CLEAN INSTALLATION**
Speaker bracket covers keep the bracket and attachment hardware hidden
- 2. ADJUSTABLE HEIGHT**
Allows speaker to be raised or lowered to the ideal placement below the display
- 3. EXPANDABLE**
Easily expand or retract the width of the universal speaker bracket to fit most soundbar speakers
- 4. UNIVERSAL FIT**
Easily attaches to most soundbar speaker models
- 5. LOW-PROFILE**
Does not add additional depth to the installation of the mount

IN-WALL

Recessed Power Outlet with Low Voltage In-Wall Cable Routing

ACCXT400 | ACCXT402



- 1. CLEAN INSTALLATION**
Eliminates clutter and organizes low voltage cables while routing them through the wall
- 2. CABLE MANAGEMENT**
Intern cable management with three separate slots for organizing and routing low voltage cables through the wall
- 3. POWER RECEPTACLE WITH SURGE SUPPRESSOR**
15 Amp/125 Volt duplex power receptacle power source with surge suppressor protection
- 4. LOW-PROFILE**
Does not add additional depth to the installation of the mount



Shown with SAX762PU/SAX772PU wall plate

SHELF ACCESSORIES



Component Shelf Accessory

ACC953



Shown with SAX762PU

- 1. CLEAN PRESENTATION**
Component shelf bracket covers keep the bracket and attachment hardware hidden
- 2. ADJUSTABLE HEIGHT**
Allows shelf to be raised or lowered to the ideal placement below the display
- 3. EXPANDABLE**
Easily expand or retract the width of the shelf base to customize the shelf to fit the component
- 4. UNIVERSAL FIT**
Accommodates most AV components
- 5. LOW-PROFILE**
Does not add additional depth to the installation of the mount

Video Conferencing Shelf Accessories

ACCXT300 | ACCXT302



Shown with SAX762PU

- 1. CLEAN INSTALLATION**
Cable management slot keeps cables and cords neat
- 2. PERFECT POSITIONING**
Camera shelf can be raised or lowered above or below the display
- 3. TEMPERATURE REGULATION**
Ventilation slots in camera shelf help keep camera cool
- 4. UNIVERSAL FIT**
Easily accommodates most video conferencing cameras
- 5. LOW-PROFILE**
Does not add additional depth to the installation of the mount



INTEGRATED PARTNER PROGRAM



ACCXT100



ACCXT200



ACC953



ACCXT300



ACCXT302



ACCXT400



ACCXT402

Compatibility

SAX755PU, SAX762PU and SAX772PU

SAX755PU, SAX762PU and SAX772PU

SAX755PU, SAX762PU and SAX772PU

SAX755PU, SAX762PU and SAX772PU

SFX645(P), SFX650(P), SFX660(P), STX645(P)(L), STX650(P)(L) and STX660(P)(L)

SAX762PU and SAX772PU

SFX645(P), SFX650(P), SFX660(P), STX645(P)(L), STX650(P)(L) and STX660(P)(L)



Max load

15lb (6.8kg)

25lb (11.34kg)

20lb (9kg)

10lb (4.5kg)

5lb (2.27kg)

—

—

Additional accessories



ACC415: 4-pack Metal Stud Fastener Kit



IBA4-W: Easy Mount Recessed Low Voltage Cable Plate



IBA5-W: Recessed Low Voltage Media Plate with Duplex Surge Suppressor

Visit peerless-av.com to see the complete line of AV solutions from Peerless-AV.



SMARTMOUNT^{XT}

Audio Visual Mounting Solutions



888.792.7463

| WWW.TARGETD.COM

| TGSALES@TARGETDIST.COM

Peerless-AV

2300 White Oak Circle
Aurora, IL 60502 USA
Toll Free: 800-865-2112
P: 630-375-5100
F: 800-359-6500
sales@peerless-av.com

Visit us at peerless-av.com

Follow us on

